


## Instructions to update the ViewPad 10 Android OS to version 2.2

### Needed

- 1 GB USB Thumb Drive
- UNETBOOTIN App to create a bootable USB drive from an ISO file. You can download it here: [http://downloads.sourceforge.net/project/unetbootin/UNetbootin/549/unetbootin-win-549.exe?r=http%3A%2F%2Ffunetbootin.sourceforge.net%2F&ts=1302711528&use\\_mirror=cdnetworks-us-1](http://downloads.sourceforge.net/project/unetbootin/UNetbootin/549/unetbootin-win-549.exe?r=http%3A%2F%2Ffunetbootin.sourceforge.net%2F&ts=1302711528&use_mirror=cdnetworks-us-1)
- Android 2.2 ISO file for ViewPad 10. Click here to visit the ViewSonic website for the download:
  - o Website: <http://www.viewsonic.com/software-updates/viewpad10/>
  - o Direct Download: [http://www.viewsonic.com/ISOs/p10t-V2.2-1.4\\_viewsonic\\_dual.iso](http://www.viewsonic.com/ISOs/p10t-V2.2-1.4_viewsonic_dual.iso)

### Creating the USB Boot Drive

- 1) Download the UNETBOOTIN and the ViewPad 10 Android 2.2 ISO files
- 2) Insert your USB Thumb drive to an open USB Port
- 3) Run UNETBOOTIN and select Diskimage and ISO
- 4) Click the browse button and select the ISO file you downloaded.
- 5) If your USB drive was properly detected, the Drive letter should have been entered automatically. If the drive letter is incorrect, click the down arrow and select the correct drive letter assigned to the USB drive

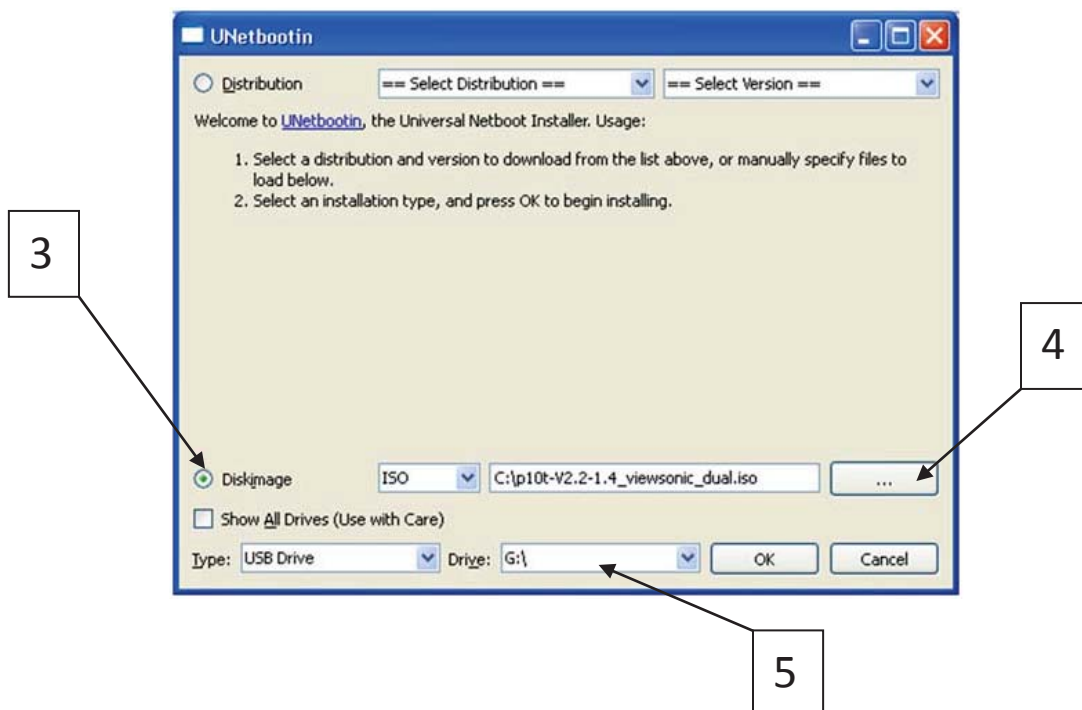

- 6) Click OK and wait until the process is done.

### **Updating the OS**

- 1) Insert the USB Drive and a USB Keyboard to the ViewPad 10. Make sure that the AC Adapter is connected to prevent sudden loss of power.
- 2) Turn the ViewPad 10 on and click F11 on the keyboard when the splash screen comes up.
- 3) Select your USB Drive on the next screen and hit Enter.
- 4) On the Android install screen, select the last item (Install to Hard Drive)
- 5) Select SDA1 Linux
- 6) Select format EXT3
- 7) Select Yes on the next screen prompts.
- 8) Reboot when done.